

DS-2CE76D0T-EXIMF 2 MP Fixed Turret Camera



- High quality imaging with 2 MP, 1920 × 1080 resolution
- 2.8 mm, 3.6 mm fixed lens
- Up to 20 m IR distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)

▪ Specification

Camera	
Image Sensor	2 MP CMOS
Signal System	PAL/NTSC
Max. Resolution	1920 (H) × 1080 (V)
Min. Illumination	0.02 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Day & Night	IR Cut Filter
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
Lens	
Lens Type	2.8 mm, 3.6 mm Fixed Lens
Focal Length & FOV	2.8 mm, horizontal FOV: 96.5°, vertical FOV: 48.9°, diagonal FOV: 120.5° 3.6 mm, horizontal FOV: 76.9°, vertical FOV: 40.6°, diagonal FOV: 92.0°
Lens Mount	M12
Illuminator	
Supplement Light Range	Up to 20 m
Image	
Frame Rate	TVI: 1080p@25fps/30fps AHD: 1080p@25fps/30fps CVI: 1080p@25fps/30fps CVBS: PAL/NTSC
Wide Dynamic Range (WDR)	Digital WDR
Image Parameters Switch	STD/HIGH-SAT
Day/Night Mode	Auto/Color/BW (Black and White)
White Balance	Auto
Image Enhancement	DWDR, BLC, Global
Noise Reduction	2D DNR
Image Settings	Brightness, Mirror, Smart IR, Sharpness, AGC
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
General	
Language	English
Operating Condition	-40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensing)
Material	Metal
Communication	HIKVISION-C
Dimension	90 mm × 82.6 mm × 79.372 mm (3.54" × 3.25" × 3.12")
Weight	Approx. 360g (0.79 lb.)
Power	12 VDC ± 25%, Max. 3.3 W
Approval	
Protection	IP67

▪ Available Model


DS-2CE76DOT-EXIMF(2.8mm)

DS-2CE76DOT-EXIMF(3.6mm)

DS-2CE76DOT-EXIMF(2.8mm)(MENA)

DS-2CE76DOT-EXIMF(3.6mm)(Chicony)

▪ **Dimension**

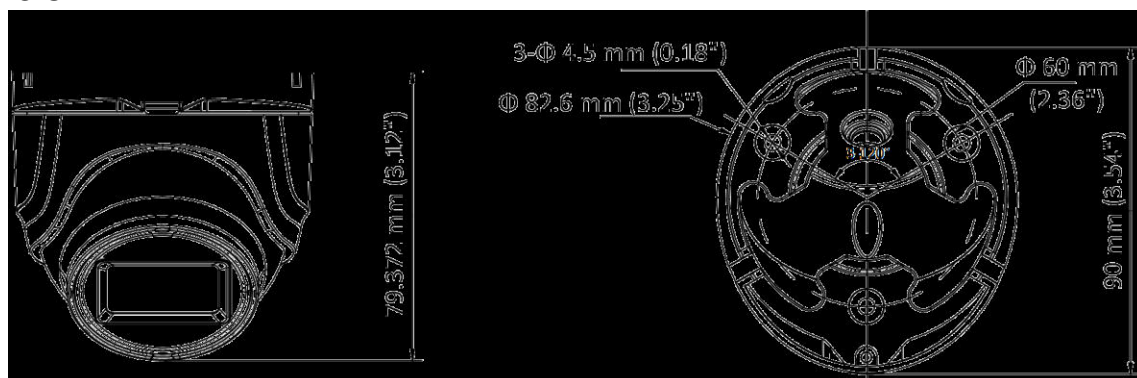

▪ **Accessory**

▪ **Optional**

DS-1275ZJ-SUS	DS-1272ZJ-110-TRS	DS-1276ZJ-SUS	DS-1280ZJ-XS
			

See Far, Go Further



www.hikvision.com
support@hikvision.com

