

DS-D5065UC-C 65-inch LCD Monitor




- Designed for video security, high reliability and stability
- 65" LED backlight with wide display equipment
- 4K resolution is 4 times the resolution of 1080p, providing a wider view and more fine detail
- Multiple inputs: HDMI, VGA, USB
- Narrow front bezel
- Wide view angle: Horizontal 178°, Vertical 178°
- 24/7 operation

• Specification

Model		DS-D5065UC-C
Display	Screen Size	65"
	Active Display Area	1428.48 (H) mm × 803.52 (V) mm
	Resolution	3840 × 2160@60 Hz
	Backlight	LED
	Pixel Pitch	0.372 (H) mm × 0.372 (V) mm
	Brightness	350 cd/m ²
	Viewing Angle	178° (H)/178° (V)
	Color Depth	8 bit
	Contrast Ratio	1200:1
	Response Time	8 ms
	Refresh Rate	60 Hz
	Haze	1%
	Reliability	7 × 24 H
	Color Gamut	72% NTSC
Interface	Video & Audio Input	HDMI 1.4 × 1, HDMI 2.0 × 1, VGA × 1, Audio in × 1
	Video & Audio Output	Speaker (6 Ω 7 W) × 2
	Data Transmission Interface	USB × 1
Power	Power Supply	100 to 240 VAC, 50/60 Hz
	Power Consumption	≤ 190 W
	Standby Consumption	≤ 0.5 W
Working Environment	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	20% to 80% RH (Non-Condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	10% to 90% RH (Non-Condensing)
General	Casing Material	Plastic
	VESA	300 mm × 300 mm (4 × M6-25 mm)
	Bezel Width	8.24 mm (top/left/right), 22.62 mm (bottom)
	Product Dimensions (W × H × D)	Without stand: 1449.6 mm × 838.38 mm × 79.6 mm (57.07" × 33.01" × 3.13") With stand: 1449.6 mm × 883.35 mm × 283.4 mm (57.07" × 34.78" × 11.16")
	Package Dimensions (W × H × D)	1600 mm × 995 mm × 175 mm (62.99" × 39.17" × 6.89")
	Net Weight	Without stand: 18.6 kg (41.01 lb.) With stand: 18.7 kg (41.23 lb.)
	Gross Weight	Without stand: 24.4 kg (53.79 lb.) With stand: 24.5 kg (54.01 lb.)
	Packing List	Power cable × 1, remote control × 1, user manual × 1, HDMI cable × 1, base bracket × 1
	Remarks	If the appearance and parameters in this specification vary from the actual product, the later prevails. You can also consult local sale staff.


Physical Interface

Interface	Description	Interface	Description
HDMI-IN1	HDMI1.4 Input, 3840 × 2160@30 Hz	VGA	VGA Input, 1920 × 1080@60 Hz
HDMI-IN2	HDMI2.0 Input, 3840 × 2160@60 Hz	AUDIO-IN	Audio Input
USB	USB 2.0 Input		

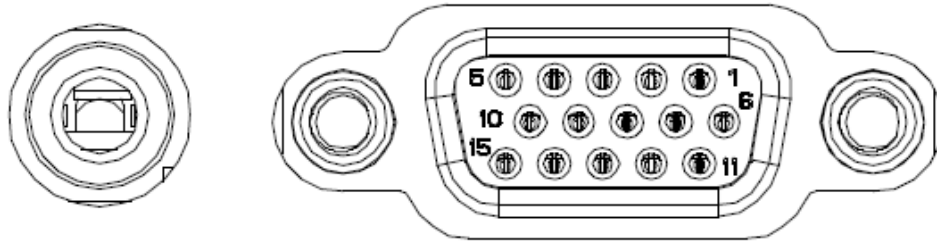

AUDIO

VGA

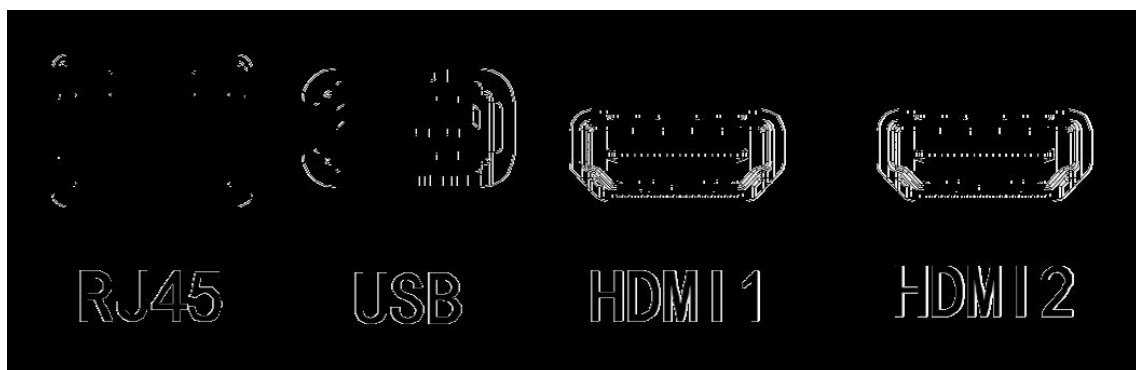

Available Model

DS-D5065UC-C

- **Accessory**

- **Optional**

DS-DM4255W
Wall-mounted
Bracket



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

