

DS-UA14 4 MP Web Camera



- 4 MP CMOS
- High quality imaging with 2560 × 1440 resolution
- Min. illumination: 0.1 Lux @ (F1.2, AGC ON)
- Built-in microphone with clear sound
- AGC for self-adaptive brightness
- Built-in speaker supports echo suppression
- Type A interface, supporting USB 3.0 protocol.
Plug-and-play, no need to install driver software



▪ Specification


Camera	
Image Sensor	4 MP CMOS
Signal System	PAL/NTSC
Resolution	2560 (H) × 1440 (V)
Frame Rate	MJPG: 2560 × 1440 @30/25 fps 1920 × 1080 @30/25 fps 1280 × 960 @30/25 fps 1280 × 720 @30/25 fps 640 × 480 @30/25 fps 640 × 360 @30/25 fps YUV: 1920 × 1080 @5 fps 1280 × 960 @5 fps 1280 × 720 @10 fps 640 × 480 @30/25 fps 640 × 360 @30/25 fps NV12: 1920 × 1080 @5 fps 1280 × 960 @10 fps 1280 × 720 @15 fps 640 × 480 @30/25 fps 640 × 360 @30/25 fps
Min. Illumination	0.1 Lux @ (F1.2, AGC ON)
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Lens	3.6 mm fixed focal lens
Field of View	horizontal FOV: 80°, vertical FOV: 50°, diagonal FOV: 88°
Lens Mount	M8
Day & Night	24/7 Color Imaging
Angle Adjustment	pan: 360°; tilt: -15° to 15°; rotation: 0°
Pickup Distance	3 m
Cable Length	1.5 m
Depth of Field	0.5 m to ∞
Speaker	
Speaker Range	0 m to 2 m
Image	
Wide Dynamic Range (WDR)	Digital WDR
Audio	
Audio Sampling Rate	Microphone: 16 kHz Speaker: 48 kHz
Interface	
Video Output	USB 3.0

Audio	Built-in speaker Built-in microphone
Operating System	Recommended systems Windows 7/8/10/11 (resolution higher than 1080P is only available in Windows 8.1 and above version) Android 8.1 and above version Linux 4.14 and above version macOS 10.12 and above version Chrome OS
General	
Operating Conditions	-10 °C to 45 °C, humidity: 90% or less (non-condensing)
Power Supply	5 VDC ± 5% (USB)
Consumption	Max. 2.5 W (Max. 4.5 W with speaker working)
Material	Plastic
Dimension	103 mm × 48.5 mm × 43.6 mm (4.05" × 1.91" × 1.72")
Weight	Approx. 113 g (0.25 lb.)
Functions	
Echo Cancellation	Yes
Accessory	
Packing List	Camera × 1 Quick Start Guide × 1

▪ Available Model

DS-UA14

▪ Dimension

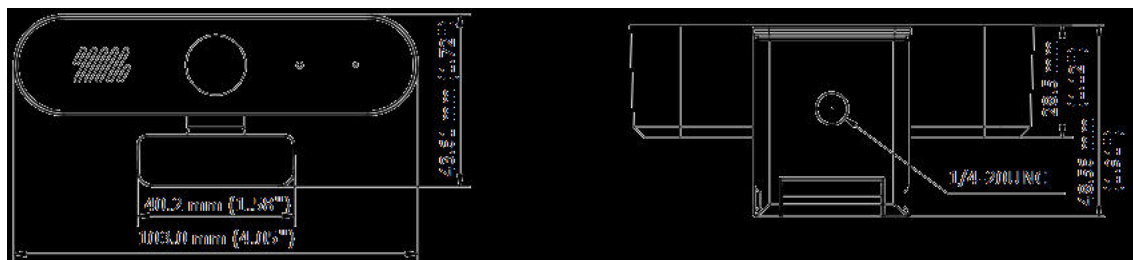

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
latam.support@hikvision.com

Hikvision Turkey
T +90 (216) 521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (0) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.pantilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-869-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com